Product Code

Nominal Dimensions

SMC-CT-OFF-X

N/A


Description

The Offset X Connector greatly simplifies and expedites installation of Secure Medium Carrier around vertical offsets, and can be built to various heights to work for custom applications. It was originally designed to provide a smooth transition between perpendicular cable trays at varying heights in an under floor installation. Offset Connectors consist of four components - Raceway base, TopCap cover, cable waterfall brackets, and Raceway joints. One manufactured mounting point at each end simplifies attachment to the mounting brackets and raceway joints. The waterfall brackets protect laid-in cable from the negative affects of improper bend radius.

Specifications

- 16-gauge electro-galvanized steel
- Components:
 - High Security Raceway base
 - High Security TopCap cover
 - ABS Internal and External cable waterfall brackets
 - Secure Raceway Joints
 - Mounting Hardware
- Weight varies depending on desired height
- One (1) manufactured mounting points in each Raceway section
- Previously manufactured "X" dimension examples: 4", 5", 5.25", 6", 6.5", 7", 7.5", 8", 8.5". 10.25"

Powder Coat Finish: White Textured

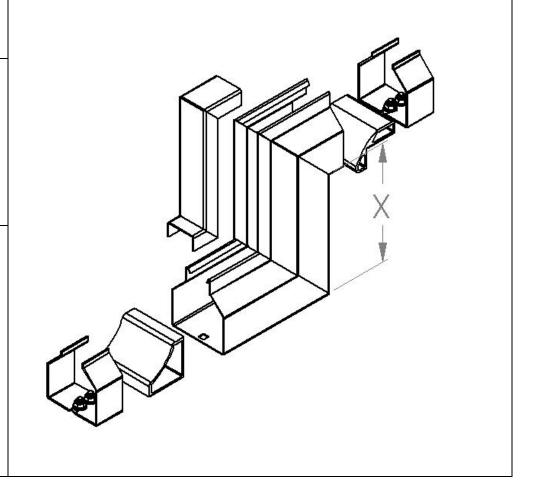



HOLOCOM, INC. customerservice@holocom.com www.holocom.com PRODUCT CODE:

SMC-CT-OFF-X

TITLE:

OFFSET CONNECTOR

All material contained in this document is the property of Holocom, Inc. and may not be reproduced or transmitted (including electronically) without the written consent of Holocom, Inc. Holocom and the Holocom logo are registered trademarks of Holocom, Inc. Other noted marks are trademarks of their respective companies. Holocom products protected by US Pats. 8,733,798; 7,661,375; 7,608,780; 7,183,488; 7,115,814; 7,053,303; 7,049,517; 6,838,616; 5,831,211; 632,763; 619,097; 580,871 and patents pending.

Made in the U.S.A. Copyright @ 2015 Holocom, Inc. All rights reserved.